


WEEDEN ENGINE, NO. 14

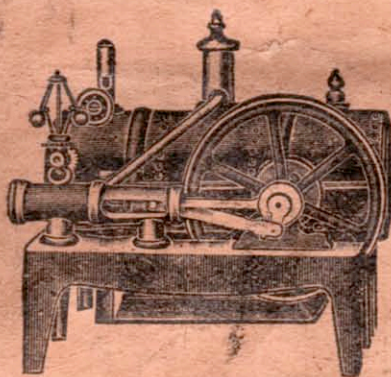

DIRECTIONS FOR RUNNING

In taking engine from box handle it carefully as it is quite heavy and a fall will spoil it.

FIRST—Oil your engine at the bearings use sewing machine oil, and always clean it neatly after use.

Now note carefully all parts of the engine and boiler. Unscrew the safety valve and notice the spiral spring and plug.

If there is too much pressure of steam this spring contracts the plug rises and allows the excess of steam to escape.

TO FILL LAMP. Remove plug and pour in TWO measures of alcohol; put the plug back and wipe off any alcohol spilled. The little tin measure found in the box is for filling lamp. The lamp wick should be about even with top of lamp tubes. **DO NOT CLOSE VENT IN LAMP.**

TO FILL BOILER. Open the whistle valve so the air in the boiler can pass out while filling it. Unscrew the safety valve on top of the boiler and pour in SIX measures of clean boiling water; replace the safety valve and screw it down firmly on its seat.

Place lamp under the boiler before lighting; after lighting, in about two minutes steam will be up then start the balance wheel and the engine will work. This engine will run fifteen or twenty minutes with one filling.

After the lamp is lighted and in position, close the throttle valve and ascertain when steam is up by opening the whistle valve. When it whistles shut the whistle and open the throttle valve and start the engine by moving the balance wheel with the finger.

Don't leave the whistle valve open too long, as the steam will escape too rapidly. The object of opening the whistle valve is to see if steam is up. If it whistles, shut the valve and start the engine; if it does not whistle, close valve, wait a minute and try again.

Use only alcohol in Lamp, it is not intended or adapted for any other fuel. If your Engine gets out of order, write us in regards to it, explaining the trouble as clearly as possible, but don't return it until you hear from us.

Each engine is tested by steam before packing and is known to be perfect.

Lamp	35c
Throttle Valve,	15c
Safety Valve	20c
Whistle	30c
Governor	25c
Water Glass with Nuts and Washers	30c
Crank, Shaft and Eccentric Rod	45c
Balance Wheel and Pulley	35c
Boiler with Trimmings	2.20
Cylinder complete with Valve Rod	1.50
Wicks	each .02

The above duplicate parts can be obtained from any Toy Dealer or will be forwarded from our factory, postpaid to any address on receipt of price.

Weeden Mfg. Co., New Bedford, Mass.

Notice.

We will not be responsible for failure of this engine to run as guaranteed if other fuel than alcohol is used.

MADE IN U. S. A.